


versatile™ 4C Mailbox, 4C13S-05

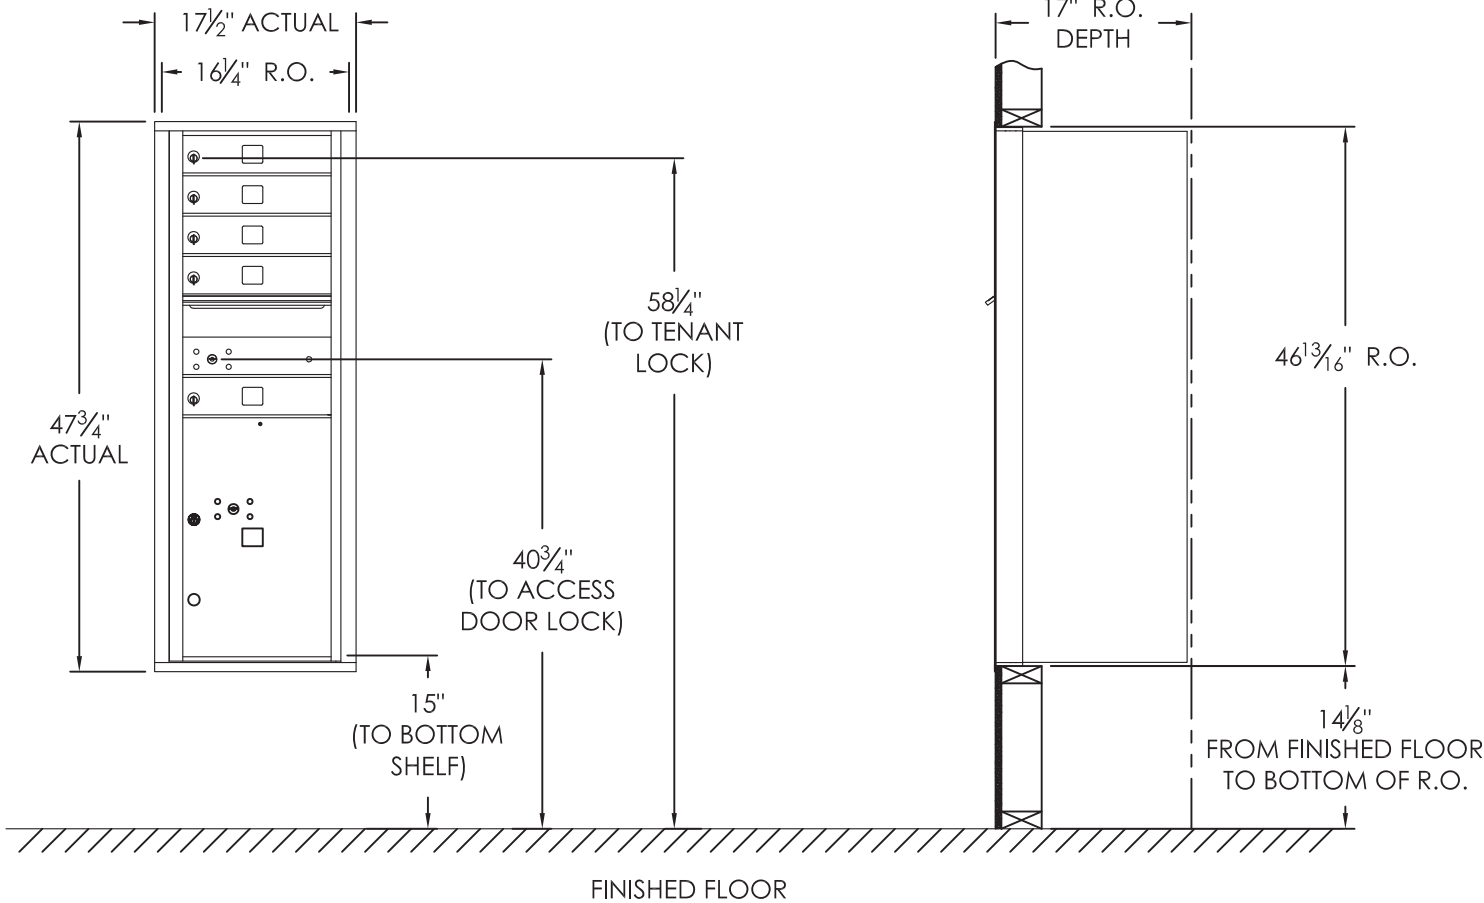

COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
MAILBOX	MB1	3" H x 12" W x 15" D	5
OUTGOING MAIL	OM2	6-1/2" H x 12" W x 15" D	1
PARCEL	PL6	20-1/2" H x 12" W x 15" D	1

- Notes:**
1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
 - a. At least one customer compartment shall be positioned less than 48" above finished floor (AFF).
 - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - c. No patron (tenant) lock shall be positioned more than 67" AFF.
 - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
 2. This 4C mailbox can also be used for private applications.
 3. The rough opening width for multi-unit 4C installations = (the sum of all actual unit widths) - 1/8".

PRODUCT SERIES: **VERSATILE™ 4C FRONT LOAD MAILBOX**

<p style="margin: 0;">NATIONALMAILBOXES — A DIVISION OF NMHP INC. — <small>North America's Commercial & Residential Mailbox Leader!</small></p> <p style="font-size: small; margin: 0;">Address: P.O. Box 13144, Wauwatosa, WI 53213 Phone Number: 1-800-676-5161 Website: www.NationalMailboxes.com</p>	MODEL 4C13S-05	REV A
	SCALE NONE	LAST REV DATE 5/12/2014
	DRAWING NUMBER 4C13S-05CS	DRAWN BY AFD