


versatile™ 4C Mailbox, 4C14S-03

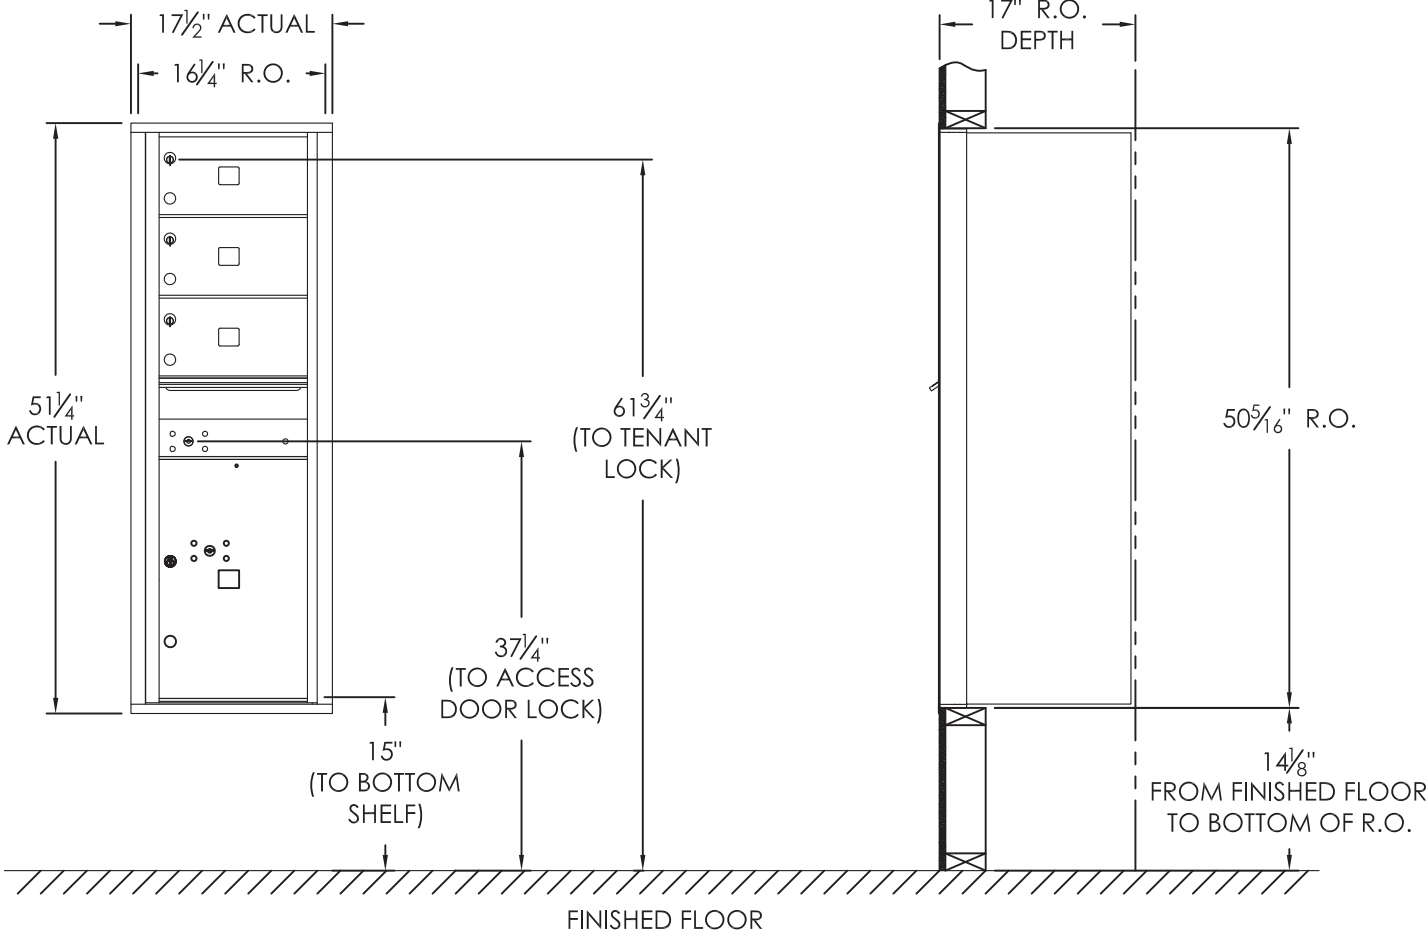


COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
MAILBOX	MB2	6-1/2" H x 12" W x 15" D	3
OUTGOING MAIL	OM2	6-1/2" H x 12" W x 15" D	1
PARCEL	PL6	20-1/2" H x 12" W x 15" D	1

- Notes:
- This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
 - At least one customer compartment shall be positioned less than 48" above finished floor (AFF).
 - No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - No patron (tenant) lock shall be positioned more than 67" AFF.
 - No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - The USPS Arrow lock shall be positioned 36"- 48" AFF.
 - This 4C mailbox can also be used for private applications.
 - The rough opening width for multi-unit 4C installations = (the sum of all actual unit widths) - 1 1/8".

PRODUCT SERIES: VERSATILE™ 4C FRONT LOAD MAILBOX

 NATIONALMAILBOXES A DIVISION OF NMHP INC. <i>North America's Commercial & Residential Mailbox Leader!</i> Address: P.O. Box 13144, Wauwatosa, WI 53213 Phone Number: 1-800-676-5161 Website: www.NationalMailboxes.com	MODEL 4C14S-03	REV A
	SCALE NONE	LAST REV DATE 5/12/2014
	DRAWING NUMBER 4C14S-03CS	DRAWN BY AFD