


# versatile™ 4C Mailbox, 4C10D-18

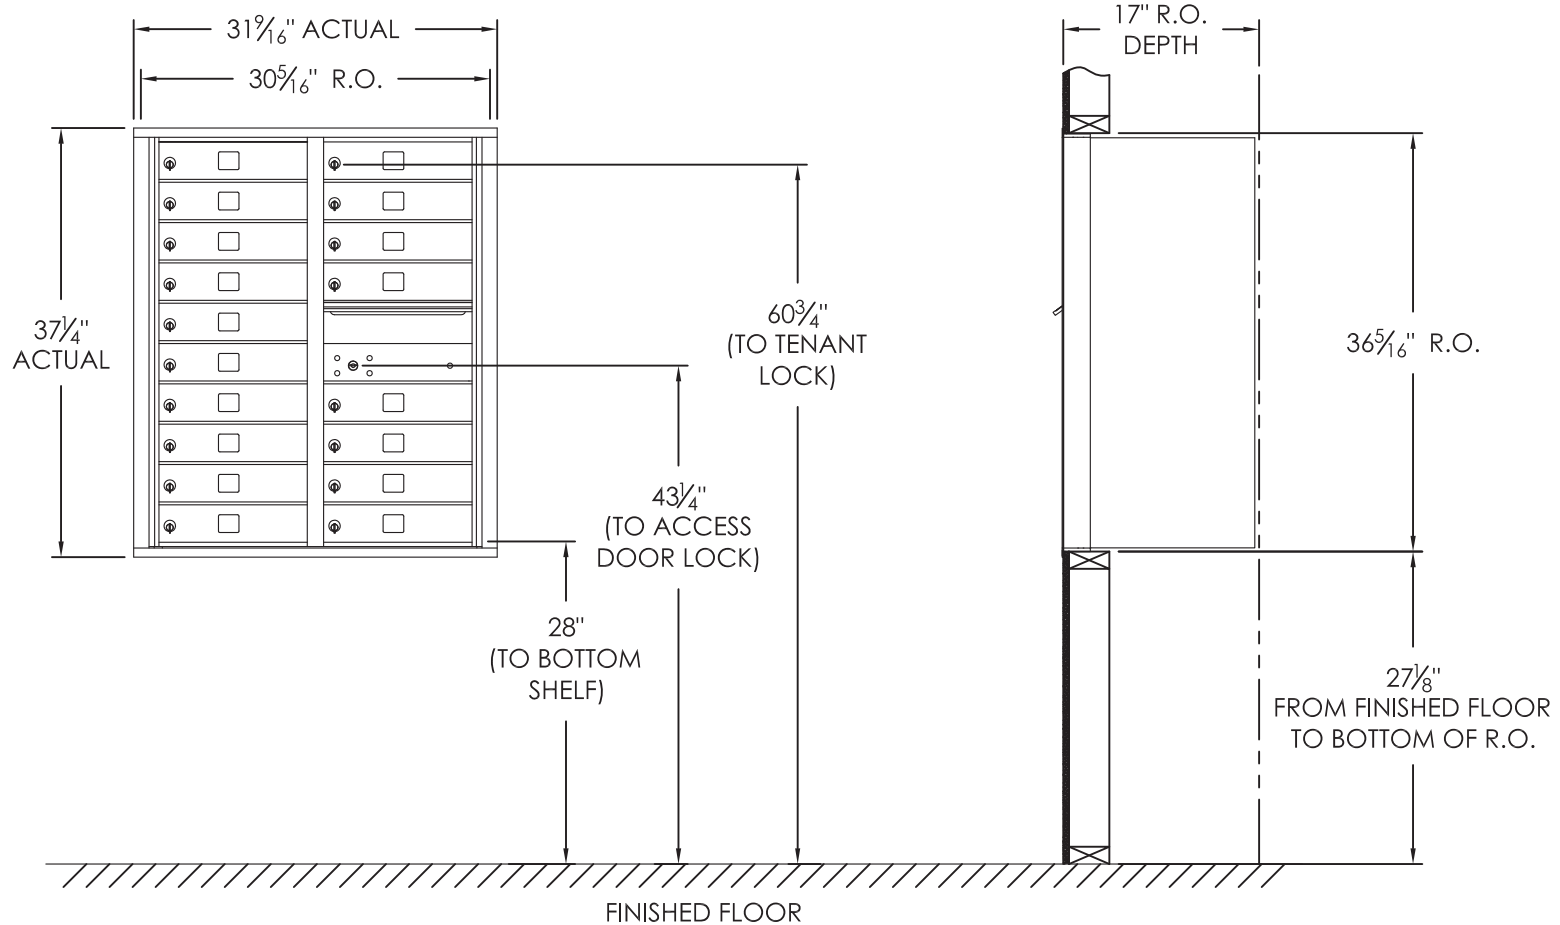

COMPARTMENT CHART

| DESCRIPTION   | COMPARTMENT | COMPARTMENT SIZE         | QTY. |
|---------------|-------------|--------------------------|------|
| MAILBOX       | MB1         | 3" H x 12" W x 15" D     | 18   |
| OUTGOING MAIL | OM2         | 6-1/2" H x 12" W x 15" D | 1    |

**Notes:**

1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
  - a. At least one customer compartment shall be positioned less than 48" above finished floor (AFF).
  - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
  - c. No patron (tenant) lock shall be positioned more than 67" AFF.
  - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
  - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
2. This 4C mailbox can also be used for private applications.
3. The rough opening width for multi-unit 4C installations = (the sum of all actual unit widths) - 1 1/8".

PRODUCT SERIES: VERSATILE™ 4C FRONT LOAD MAILBOX



**NATIONALMAILBOXES**  
— A DIVISION OF NMHP INC.

*North America's Commercial & Residential Mailbox Leader!*

Address: P.O. Box 13144, Wauwatosa, WI 53213  
Phone Number: 1-800-676-5161  
Website: www.NationalMailboxes.com

|                |            |                |           |
|----------------|------------|----------------|-----------|
| MODEL          | 4C10D-18   | REV            | B         |
| SCALE          | NONE       | LAST REV. DATE | 4/30/2014 |
| DRAWING NUMBER | 4C10D-18CS | DRAWN BY       | RAK       |