


# versatile™ 4C Mailbox, 4CADD-10

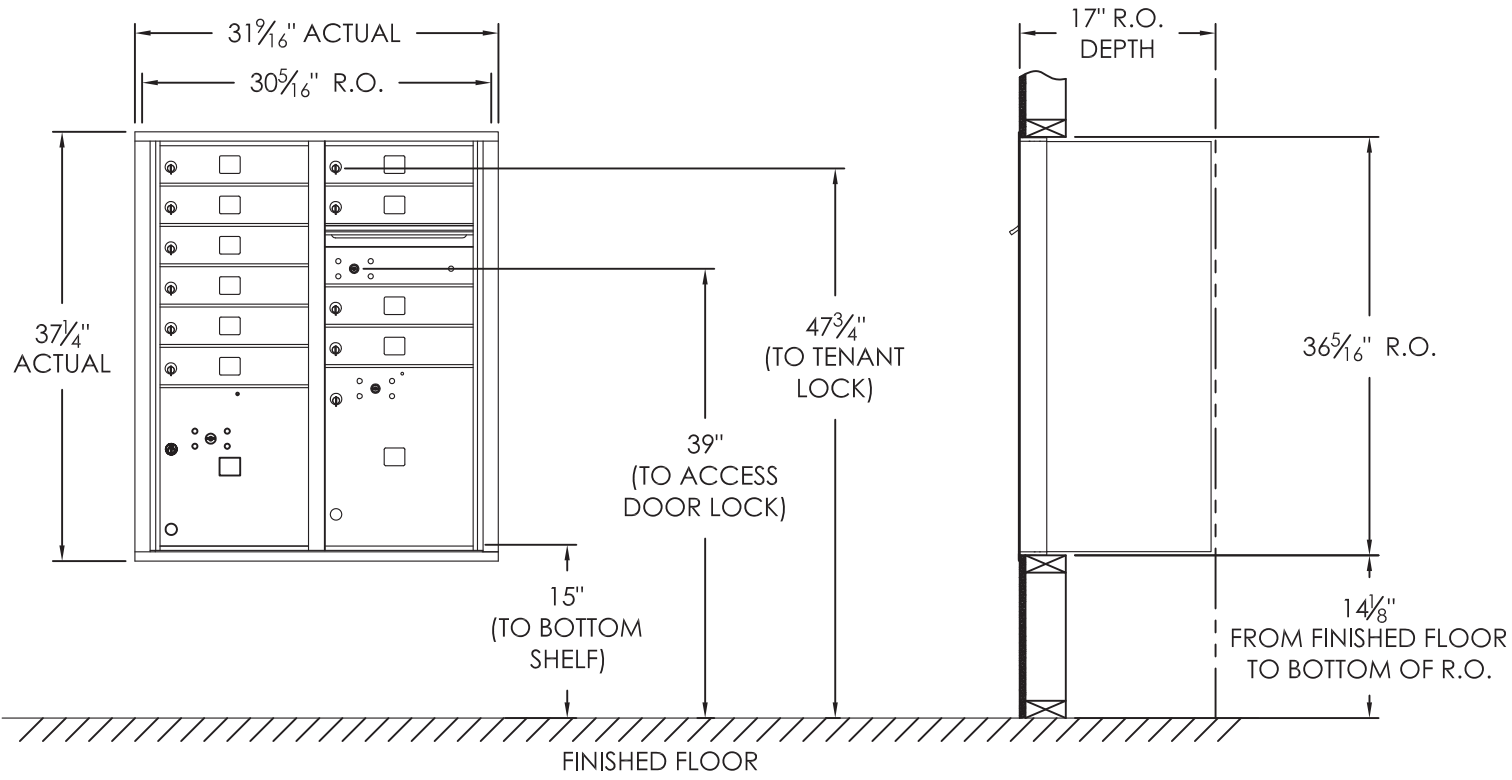


COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
MAILBOX	MB1	3" H x 12" W x 15" D	10
OUTGOING MAIL	OM1	3" H x 12" W x 15" D	1
PARCEL	PL4	13-1/2" H x 12" W x 15" D	1
PARCEL	PL15	15" H x 12" W x 15" D	1

- Notes:
- This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
    - At least one customer compartment shall be positioned less than 48" above finished floor (AFF).
    - No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
    - No patron (tenant) lock shall be positioned more than 67" AFF.
    - No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
    - The USPS Arrow lock shall be positioned 36"- 48" AFF.
  - This 4C mailbox can also be used for private applications.
  - The rough opening width for multi-unit 4C installations = (the sum of all actual unit widths) - 1/8".

PRODUCT SERIES: VERSATILE™ 4C FRONT LOAD MAILBOX

 <b>NATIONAL MAILBOXES</b> A DIVISION OF NMHP INC. <i>North America's Commercial &amp; Residential Mailbox Leader!</i> Address: P.O. Box 13144, Wauwatosa, WI 53213 Phone Number: 1-800-676-5161 Website: www.NationalMailboxes.com	MODEL 4CADD-10	REV C
	SCALE NONE	LAST REV DATE 2/16/2017
	DRAWING NUMBER 4CADD-10CS	DRAWN BY NBC