versatile™ 4C Mailbox, 4C15D-28

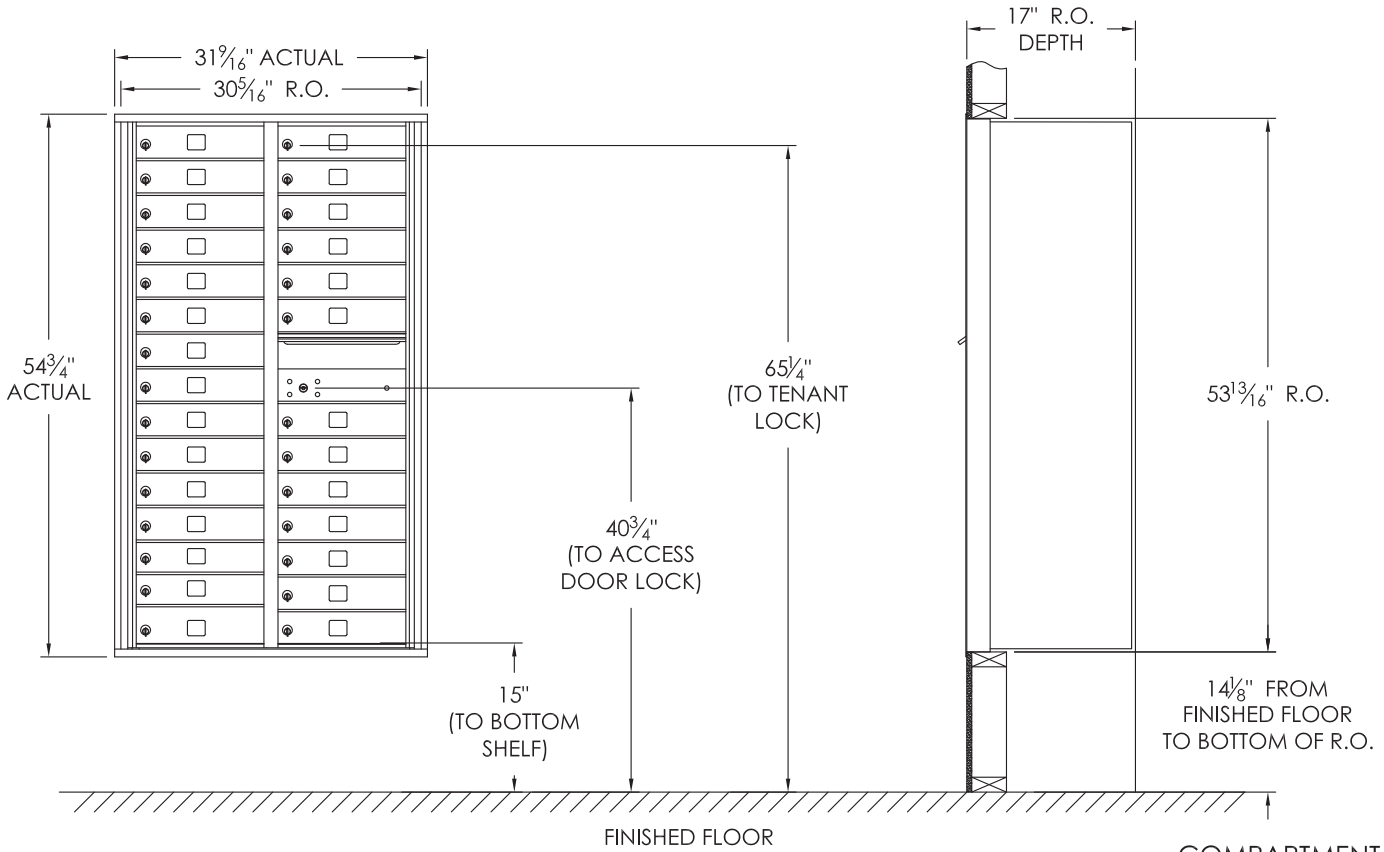

COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
MAILBOX	MB1	3" H x 12" W x 15" D	28
OUTGOING MAIL	OM2	6-1/2" H x 12" W x 15" D	1

Notes:

1. This module does NOT meet USPS STD-4C installation specification requirements as shown below:
   a. At least one customer compartment shall be positioned less than 48" above finished floor (AFF).
   b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
   c. No patron (tenant) lock shall be positioned more than 67" AFF.
   d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
   e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
2. This 4C mailbox is to be used for private applications.
3. The rough opening width for multi-unit 4C installations = (the sum of all actual unit widths) - 1⅛".

PRODUCT SERIES: VERSATILE™ 4C FRONT LOAD MAILBOX

NATIONALMAILBOXES
A DIVISION OF NMHP INC.
North America's Commercial & Residential Mailbox Leader!
Address: P.O Box 13144, Wauwatosa, WI 53213
Phone Number: 1-800-676-5161
Website: www.NationalMailboxes.com

MODEL	4C15D-28	REV	C
SCALE	NONE	LAST REV DATE	5/15/14
DRAWING NUMBER	4C15D-28CS	DRAWN BY	RS