


versatile™ 4C Mailbox, 4C15S-06

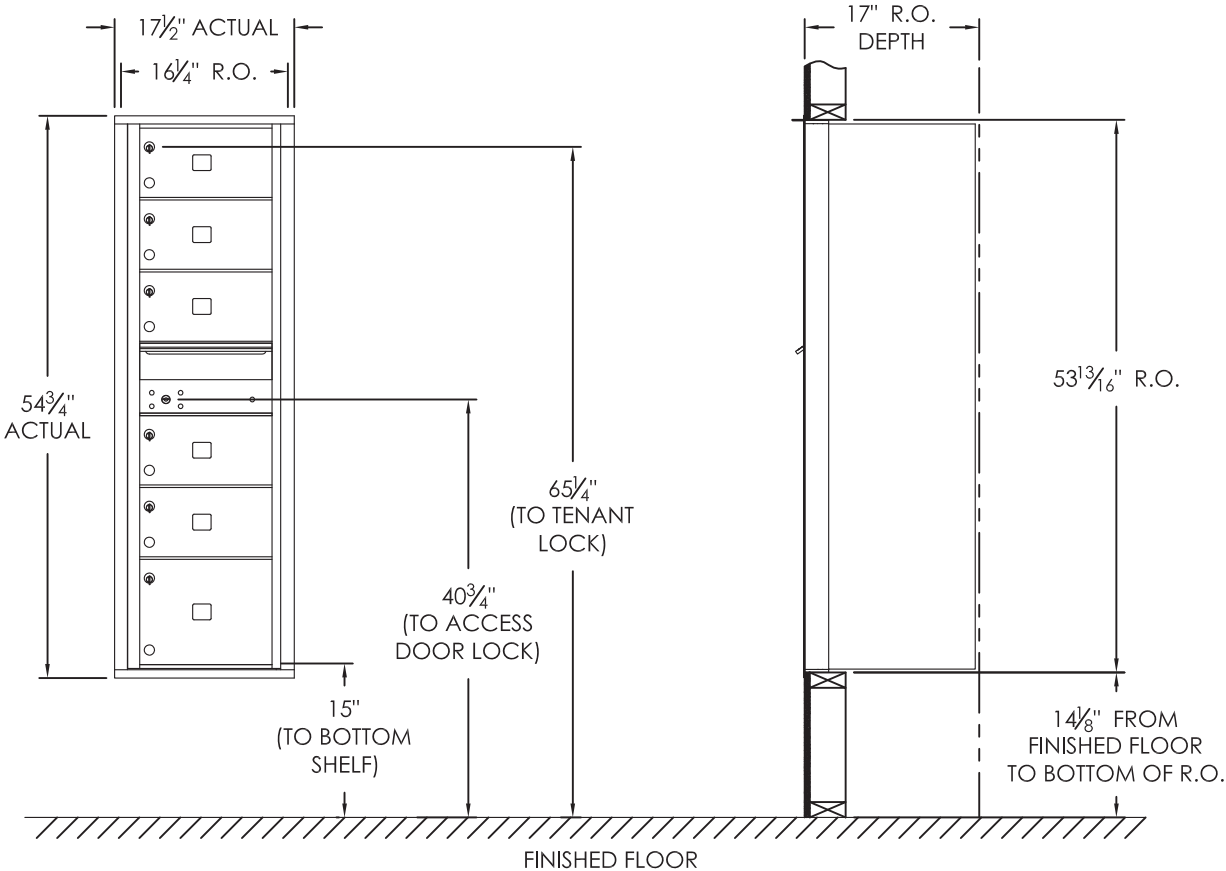

COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
MAILBOX	MB2	6-1/2" H x 12" W x 15" D	5
MAILBOX	MB3	10" H x 12" W x 15" D	1
OUTGOING MAIL	OM2	6-1/2" H x 12" W x 15" D	1

- Notes:**
1. This module does NOT meet USPS STD-4C installation specification requirements as shown below:
 - a. At least one customer compartment shall be positioned less than 48" above finished floor (AFF).
 - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - c. No patron (tenant) lock shall be positioned more than 67" AFF.
 - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
 2. This 4C mailbox is to be used for private applications.
 3. The rough opening width for multi-unit 4C installations = (the sum of all actual unit widths) - 1 1/8".

PRODUCT SERIES: **VERSATILE™ 4C FRONT LOAD MAILBOX**

NATIONAL MAILBOXES A DIVISION OF NMHP INC. <i>North America's Commercial & Residential Mailbox Leader!</i> Address: P.O. Box 13144, Wauwatosa, WI 53213 Phone Number: 1-800-676-5161 Website: www.NationalMailboxes.com	MODEL 4C15S-06	REV D
	SCALE NONE	LAST REV. DATE 5/15/14
DRAWING NUMBER 4C15S-06CS		DRAWN BY RS