
## versatile<sup>TM</sup> 4C Mailbox, 4C16D-6P

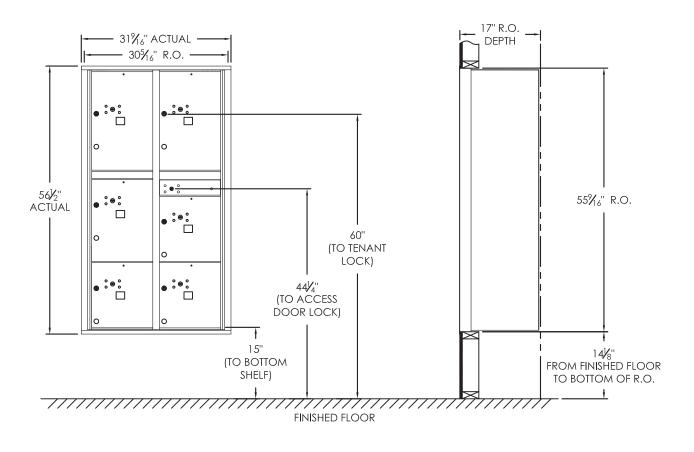

## COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
PARCEL	PL4	13-1/2" H x 12" W x 15" D	3
PARCEL	PL5	17" H x 12" W x 15" D	1
PARCEL	PL6	20-1/2" H x 12" W x 15" D	2

## Notes:

- 1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
  - a. At least one customer compartment shall be positioned less then 48" above finished floor (AFF).
  - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
  - c. No patron (tenant) lock shall be positioned more than 67" AFF.
  - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
  - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
- 2. This 4C mailbox can also be used for private applications.
- 3. The rough opening width for multi-unit 4C installations = (the sum of all actual unit widths)  $1\frac{1}{8}$ ".

PRODUCT SERIES: VERSATILETM 4C FRONT LOAD MAILBOX



North America's Commercial & Residential Mailbox Lead
Address: P.O Box 13144, Wauwatosa, WI 53213

Phone Number: 1-800-676-5161
Website: www.NationalMailboxes.com

2	MODEL 4C16D-6P		REV	С
<b>C</b> .	SCALE	NONE	LAS	t rev date 5/12/2014
lerl	DRAWING	NUMBER		DRAWN BY
	4C1	16D-6PCS		SDH