



versatile™ 4C Mailbox, 9 High Suite

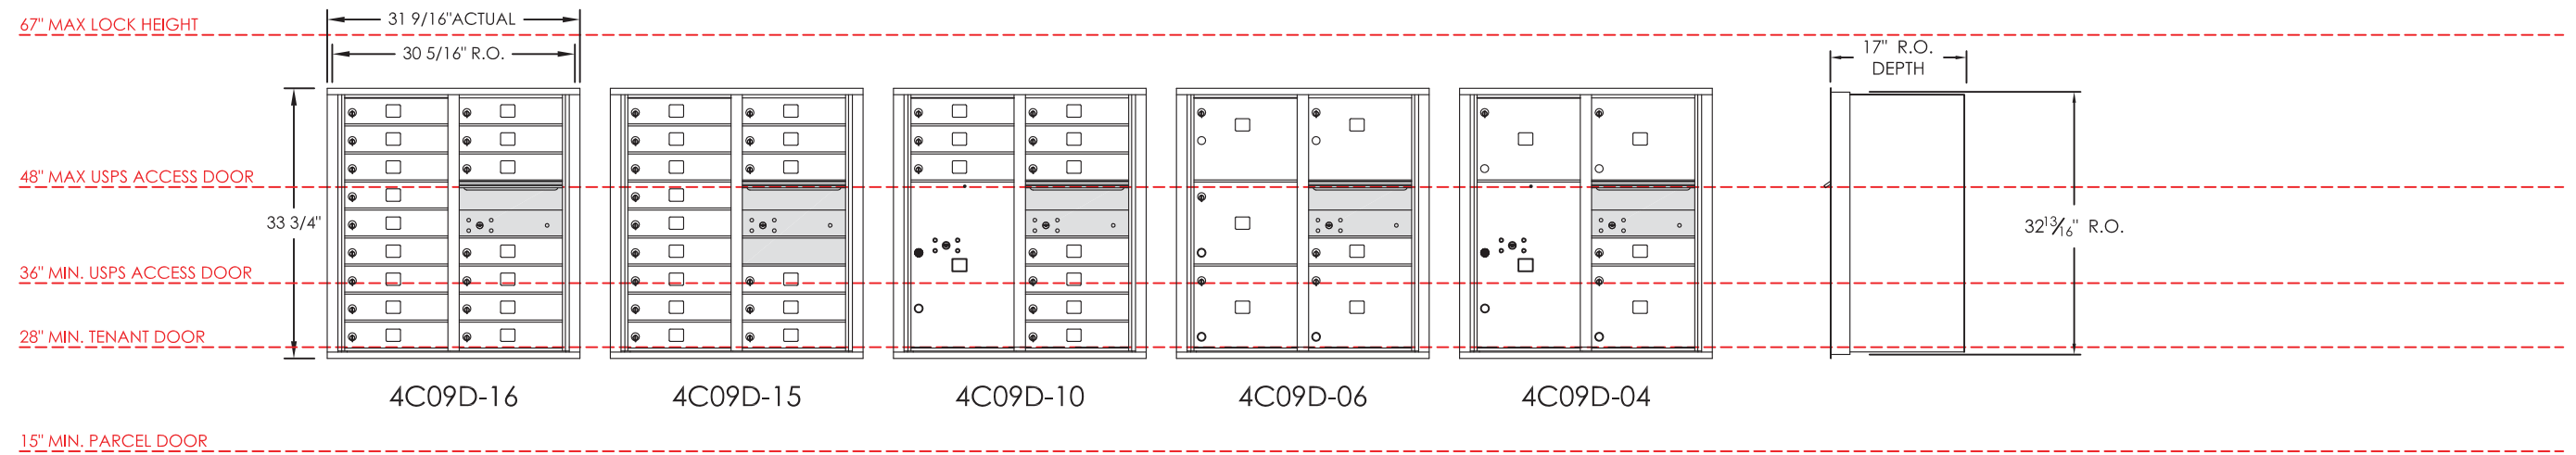

Floor

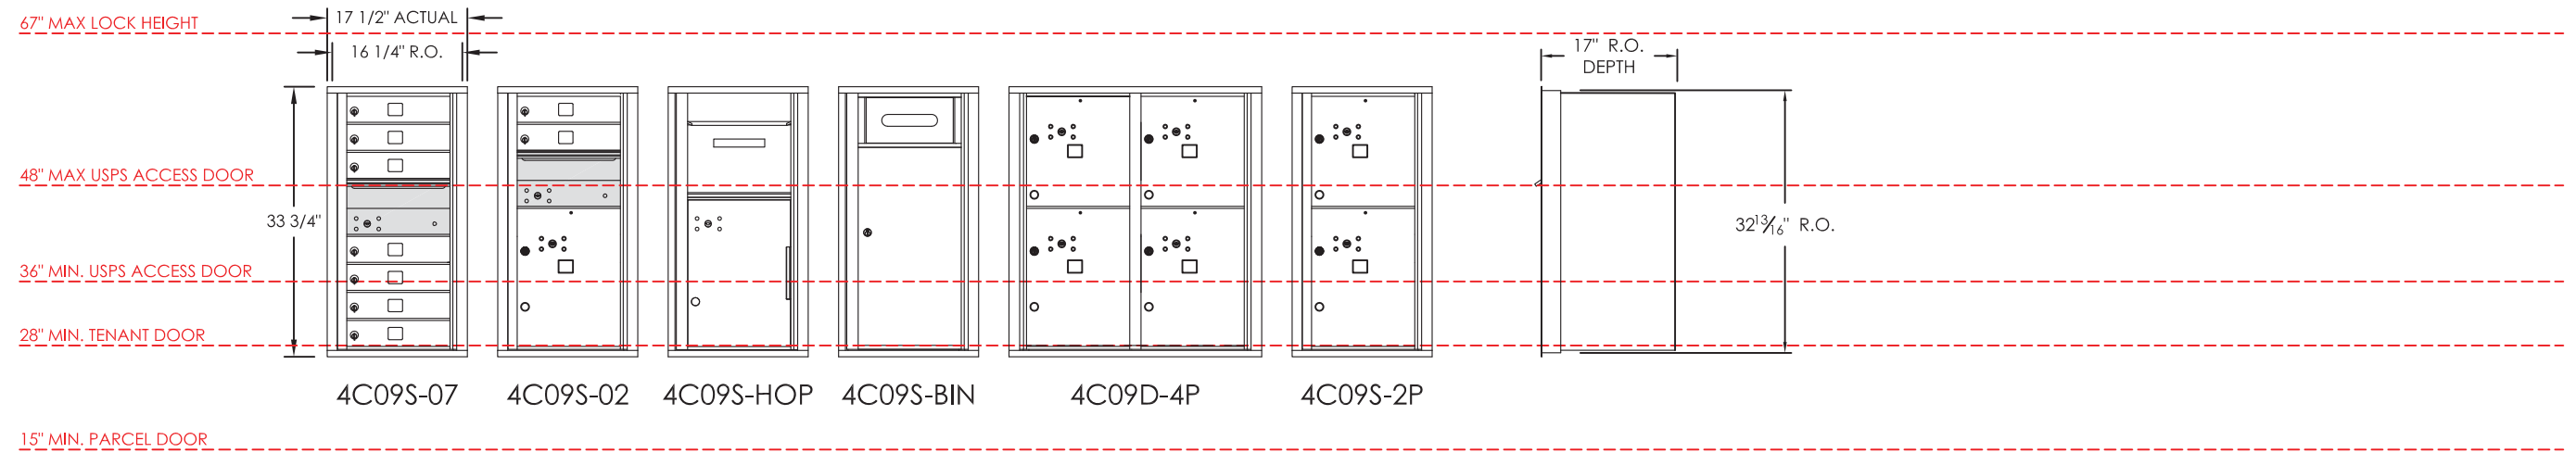

Floor

NOTES:

1. Below are the USPS STD-4C installation guidelines:

- a. At least one customer compartment shall be positioned less than 48" above finished floor (AFF).
- b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
- c. No patron (tenant) lock shall be positioned more than 67" AFF.
- d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
- e. The USPS Arrow lock shall be positioned 36"- 48" AFF.

PRODUCT SERIES: versatile™ 4C Mailbox 9 High Suite

MODEL	4C9H	REV	
SCALE	NONE	LAST REV DATE	5/15/2014
DRAWING NUMBER	4C9HCS	DRAWN BY	AFD
		SHEET	1 OF 1